

BRFL12N65S

Rev.A Dec.-2023

描述 / Descriptions

TO-220FL 塑封封装 N 沟道 MOS 场效应管。
N-CHANNEL MOSFET in a TO-220FL Plastic Package.


特征 / Features

低栅电荷,低反馈电容,开关速度快。具有良好的电磁干扰性能。
Low gate charge, Low Crss , Fast switching. Have good Electromagnetic Interference performance.


用途 / Applications

用于高频开关电源,电子镇流器,UPS 电源。
High efficiency switch mode power supplies, Electronic lamp ballasts based on half bridge, UPS .

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning

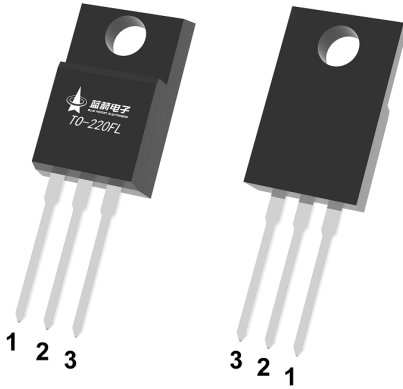

PIN1 : G

PIN 2 : D

PIN 3 : S

印章代码 / Marking

见印章说明。
See Marking Instructions.


极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Drain-Source Voltage	V _{DSS}	650	V
Drain Current	I _D (Tc=25°C)	12	A
Drain Current	I _D (Tc=100°C)	7.6	A
Drain Current - Pulsed	I _{DM}	48	A
Gate-Source Voltage	V _{GS}	±30	V
Single Pulsed Avalanche Energy	E _{AS}	880	mJ
Avalanche Current	I _{AR}	12	A
Power Dissipation	P _D	54	W
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to 150	°C
Junction to Ambient	R _{θJA}	62.5	°C/W
Junction to Case	R _{θJC}	2.3	°C/W


电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V I _D =250μA	650	690		V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =650V V _{GS} =0V			1.0	μA
Gate-Body Leakage Current Forward	I _{GSS}	V _{GS} =±30V V _{DS} =0V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} I _D =250μA	2.0	3.4	4.0	V
Static Drain-Source On-Resistance	R _{DS(on)}	V _{GS} =10V I _D =6A		0.57	0.78	Ω
Input Capacitance	C _{iSS}	V _{DS} =25V V _{GS} =0V f=1.0MHz		2000		pF
Output Capacitance	C _{oss}			260		
Reverse Transfer Capacitance	C _{rSS}			8		
Total Gate Charge	Q _G	V _{DS} = 520V, I _D = 12A, V _{GS} = 10V		43		nC
Gate-Source Charge	Q _{GS}			8.8		
Gate-Drain Charge	Q _{GD}			20		
Turn-On Delay Time	t _{d(on)}	V _{DD} =325V I _D =12A R _G =25Ω V _{GS} = 10V		32		ns
Turn-On Rise Time	t _r			117		
Turn-Off Delay Time	t _{d(off)}			98		
Turn-Off Fall Time	t _f			88		
Drain-Source Diode Forward Voltage	V _{SD}	V _{GS} = 0 V, I _S = 12A			1.4	V


电参数曲线图 / Electrical Characteristic Curve

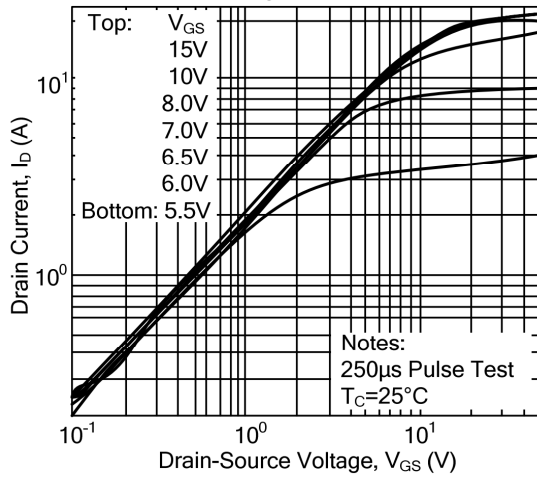

1. On-Resign Characteristics

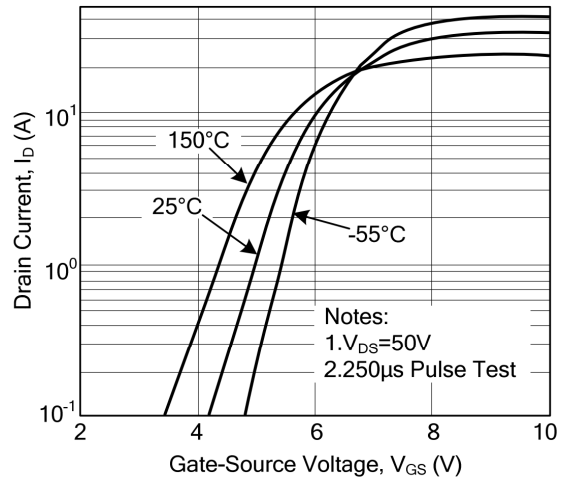

2. Transfer Characteristics

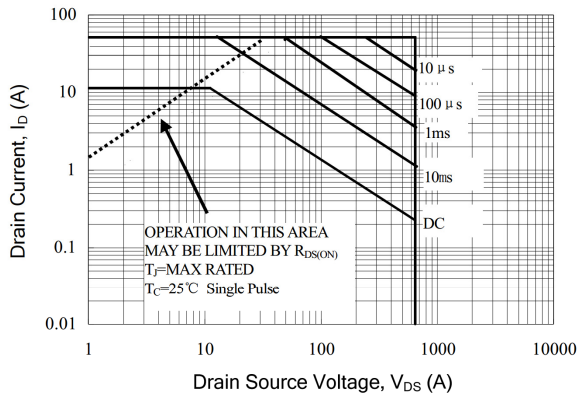


3. Maximum Safe Operating Area


外形尺寸图 / Package Dimensions

TO-220FL

单位: mm

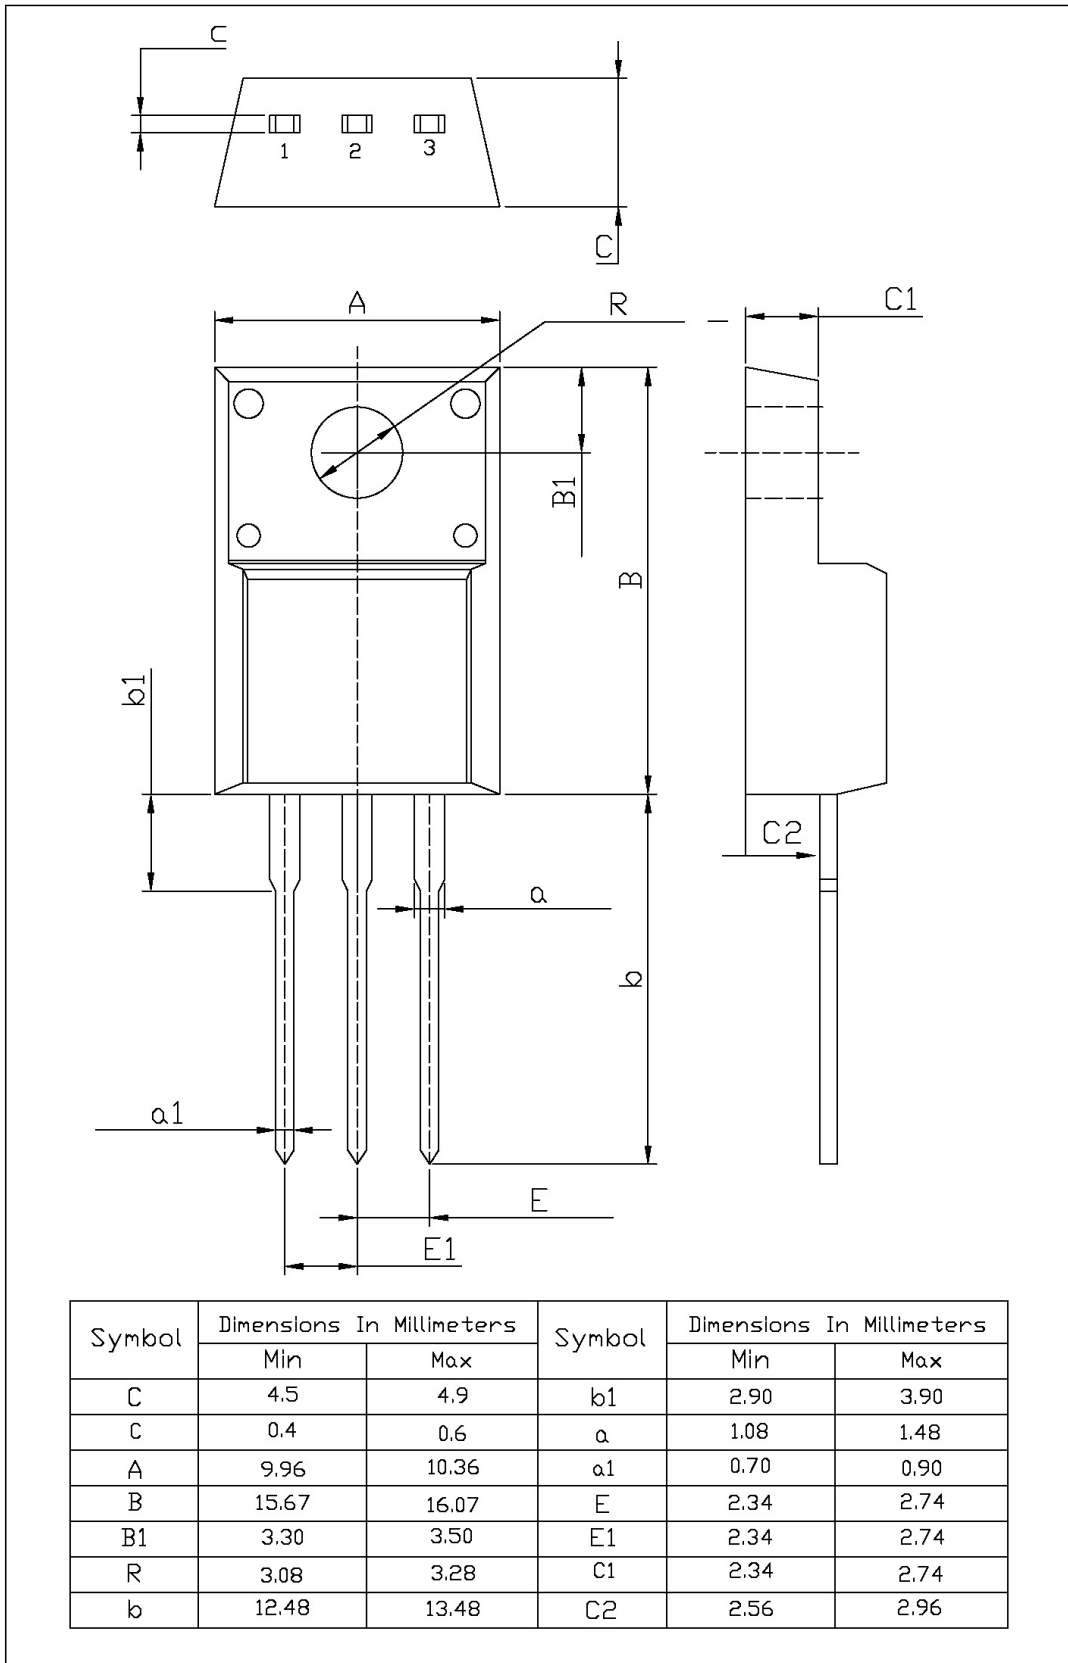

印章说明 / Marking Instructions

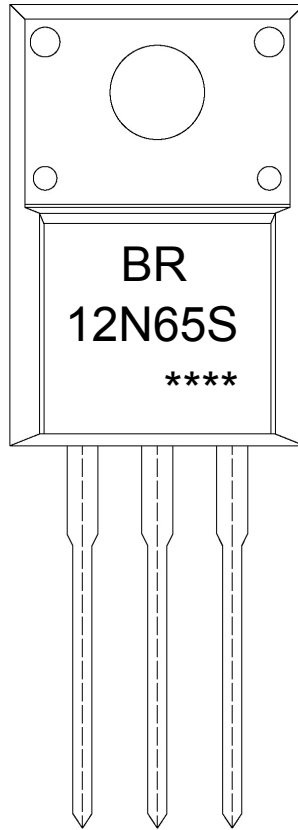

说明：

BR： 为公司代码

12N65S： 为型号代码


****： 为生产批号代码，随生产批号变化

Note:

BR: Company Code

12N65S: Product Type Code

****: Lot No. Code, code change with Lot No

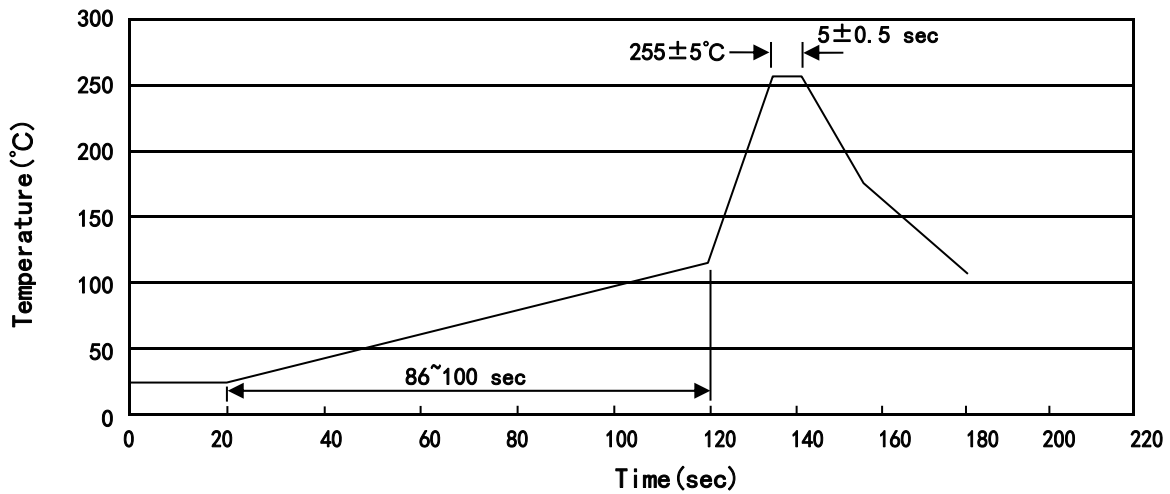波峰焊温度曲线图(无铅) / Temperature Profile for Dip Soldering(Pb-Free)


说明：

- 1、预热温度 25~150°C，时间 60~90sec;
- 2、峰值温度 255±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2~10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：270±5°C

时间：10±1 sec.

Temp.:270±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

套管包装 / TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-220FL	50	20	1,000	5	5,000	532×33×7.0	555×164×50	575×290×180

使用说明 / Notices