

79L05

Rev.E Oct.-2023

描述 / Descriptions

TO-92 塑封封装电压调整器。Voltage Regulator in a TO-92 Plastic Package.

特征 / Features

三端稳压调整器，输出电流高达 100mA, 内设过热保护和短路限制。


3-Terminal regulators, output current up to 100 mA, internal thermal overload protection and short-circuit limiting.

用途 / Applications


电压调整器。

Voltage Regulator.

内部等效电路/应用电路 / Equivalent Circuit or Application Circuit

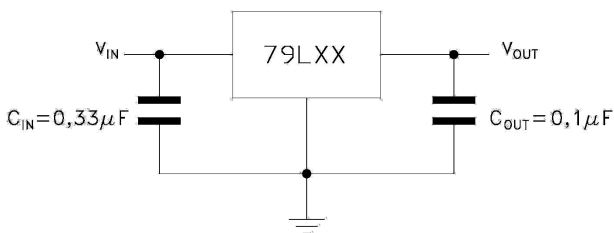

引脚排列 / Pinning

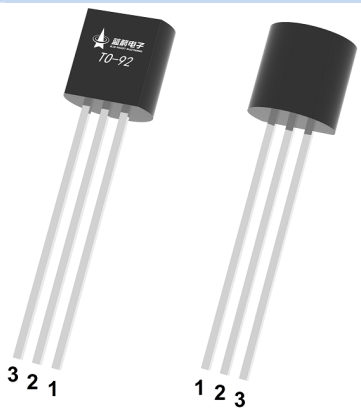

PIN 1 : OUT

PIN 2 : IN

PIN 3 : GND

印章代码 / Marking

见印章说明。

See Marking Instructions.






极限参数 / Absolute Maximum Ratings(Ta=25°C)

参数 Parameter	符号 Symbol	数值 Rating	单位 Unit
Input voltage	V _I	-35	V
Output current	I _O	100	mA
Operating virtual Junction temperature	T _J	0~125	°C
Power Dissipation	P _D	625	mW
Storage temperature range	T _{stg}	-65~150	°C

电性能参数 / Electrical Characteristics(Ta=25°C)

参数 Parameter	符号 Symbol	测试条件 Test Conditions	最小值 Min	典型值 Typ	最大值 Max	单位 Unit
Output voltage	V _O	I _O =40mA T _J =25°C	-4.80	-5.0	-5.2	V
		-7.5V≤V _{in} ≤-20V 5mA≤I _{out} ≤100mA	-4.75	-5.0	-5.25	
Line Regulation	REG _{line}	-7.5V≤V _{in} ≤-20V I _O =40mA T _J =25°C		50	150	mV
Load Regulation	REG _{load}	5mA≤I _{out} ≤100mA T _J =25°C		20	60	
		5mA≤I _{out} ≤40mA T _J =25°C		10	30	
Bias current	I _Q	I _{out} =0 T _J =25 °C		3	6	mA
Bias current change	ΔI _Q	-8V≤V _{in} ≤-20V			1.5	
		1mA≤I _{out} ≤40mA			0.1	
Output noise voltage	V _N	10Hz≤f≤100KHz T _J =25 °C		40		μV
Ripple rejection	RR	f=120Hz -8V≤V _{in} ≤-18V	41	49		dB
Dropout voltage	V _D	T _J =25 °C		1.7		V


电参数曲线图 / Electrical Characteristic Curve

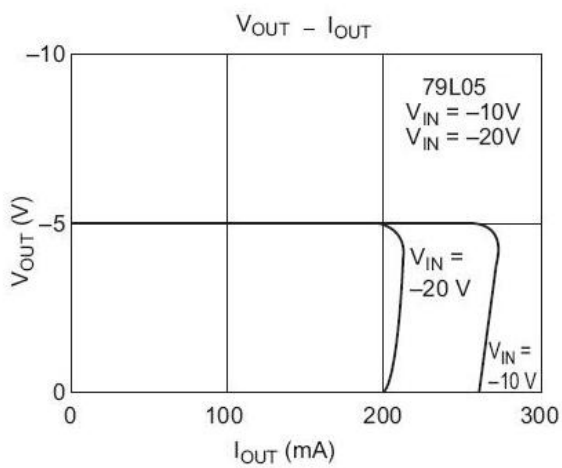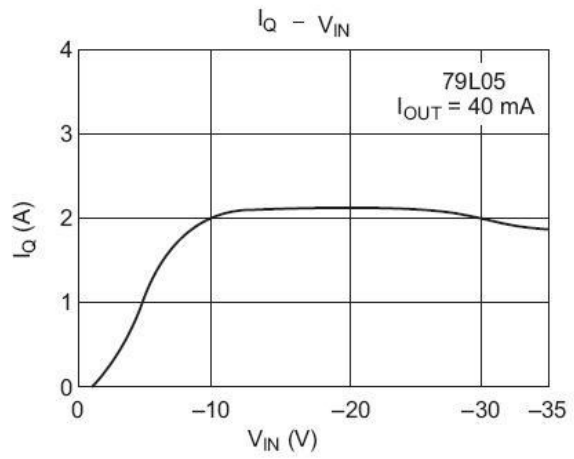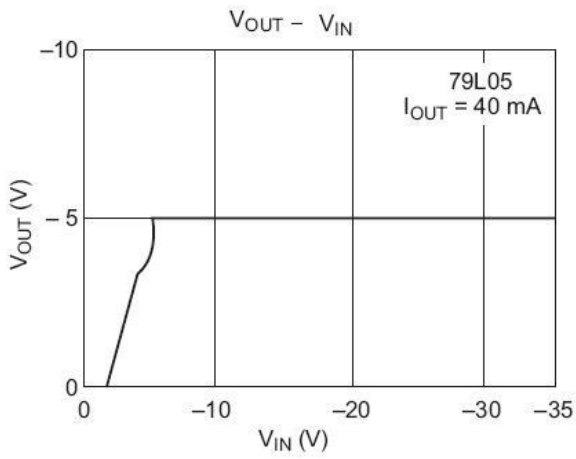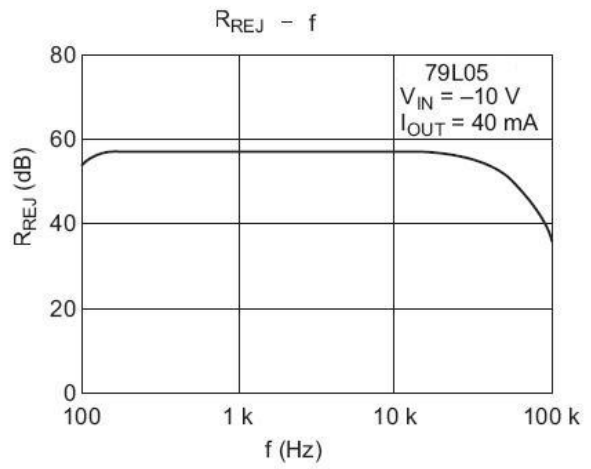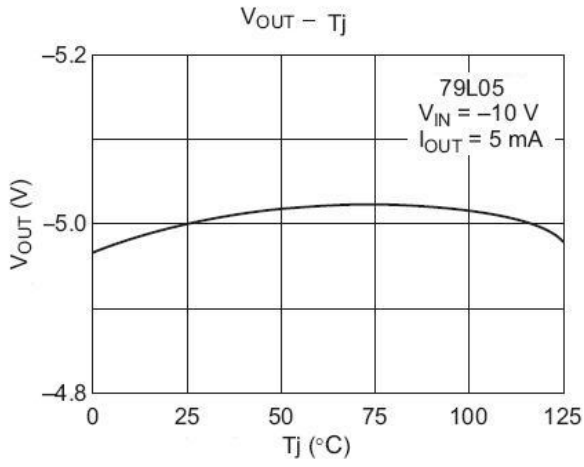


外形尺寸图 / Package Dimensions

TO-92

Unit: mm

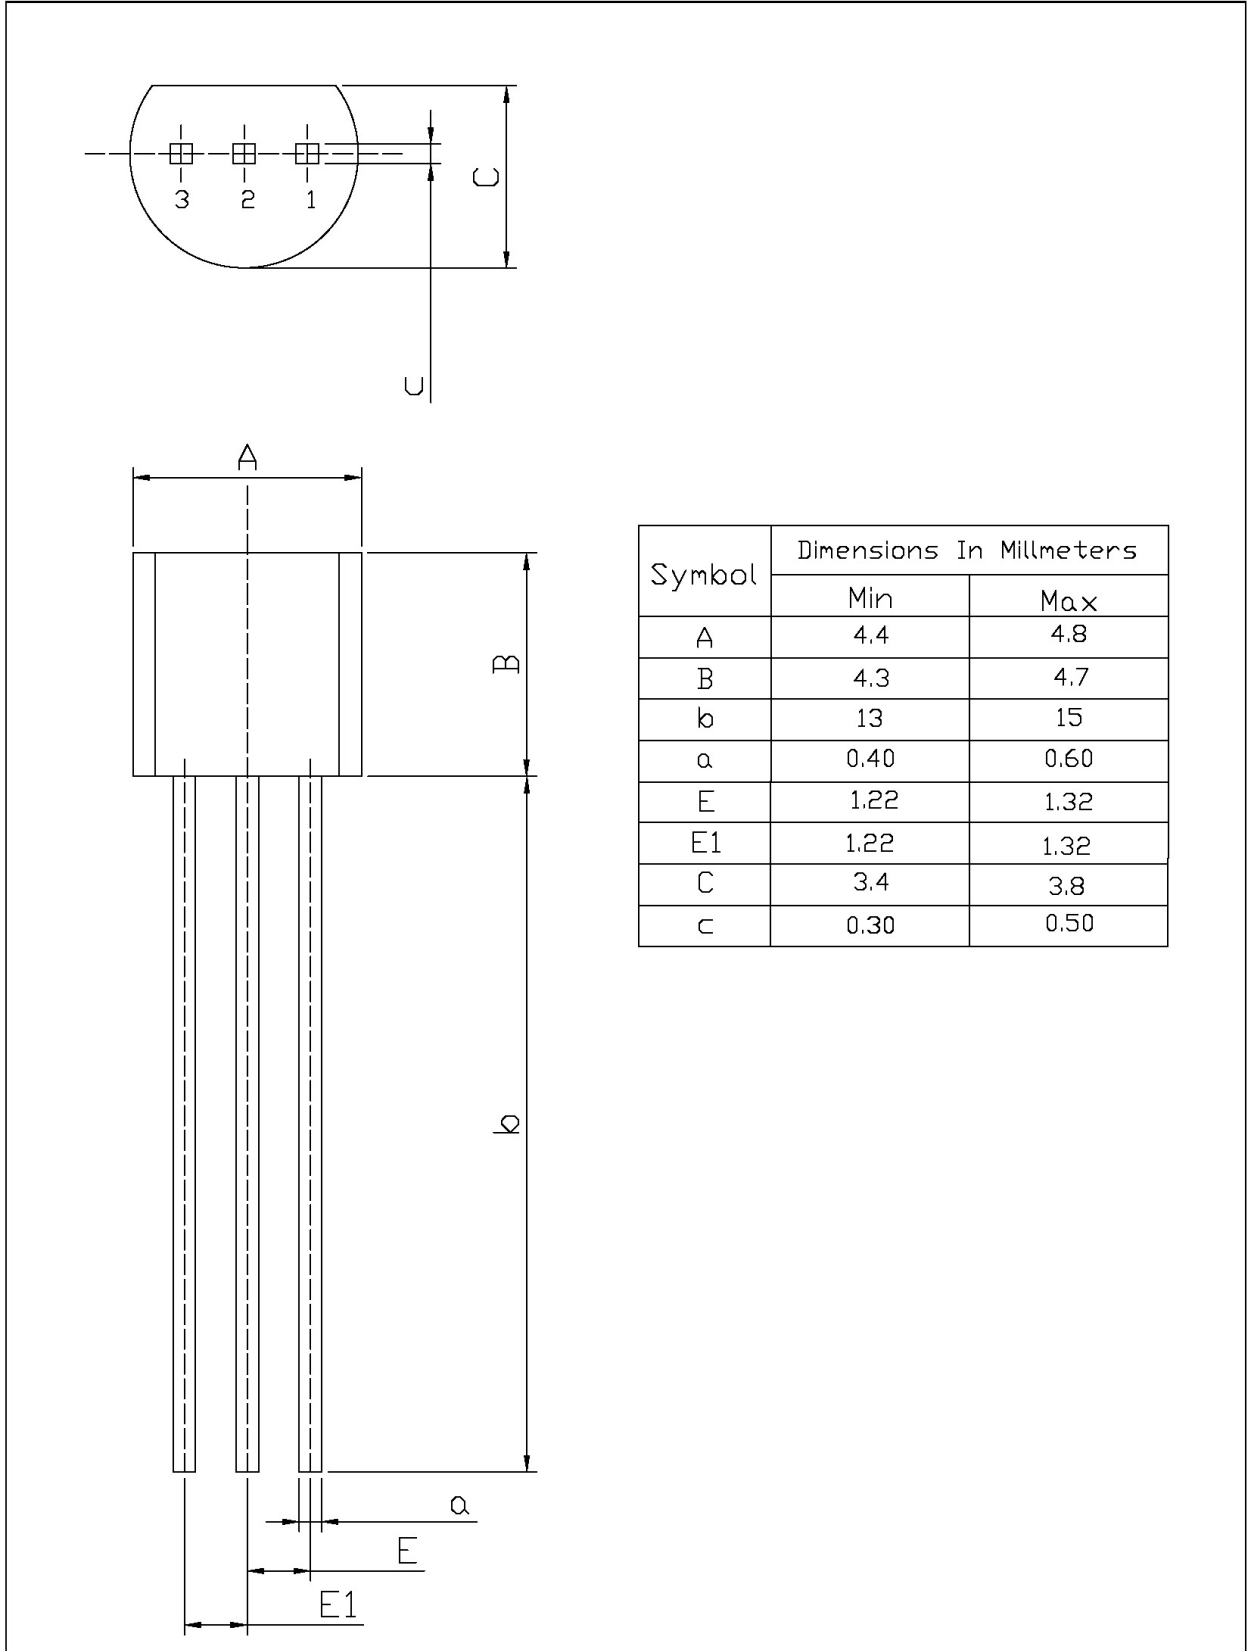

印章说明 / Marking Instructions

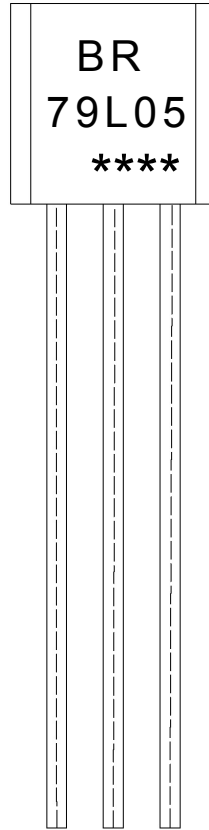

说明：

BR： 为公司代码

79L05： 为产品型号

****： 为生产批号代码，随生产批号变化


Note:

BR: Company Code

79L05: Product Type

****: Lot No. Code, code change with Lot No

波峰焊温度曲线图(无铅) / Temperature Profile for Dip Soldering(Pb-Free)

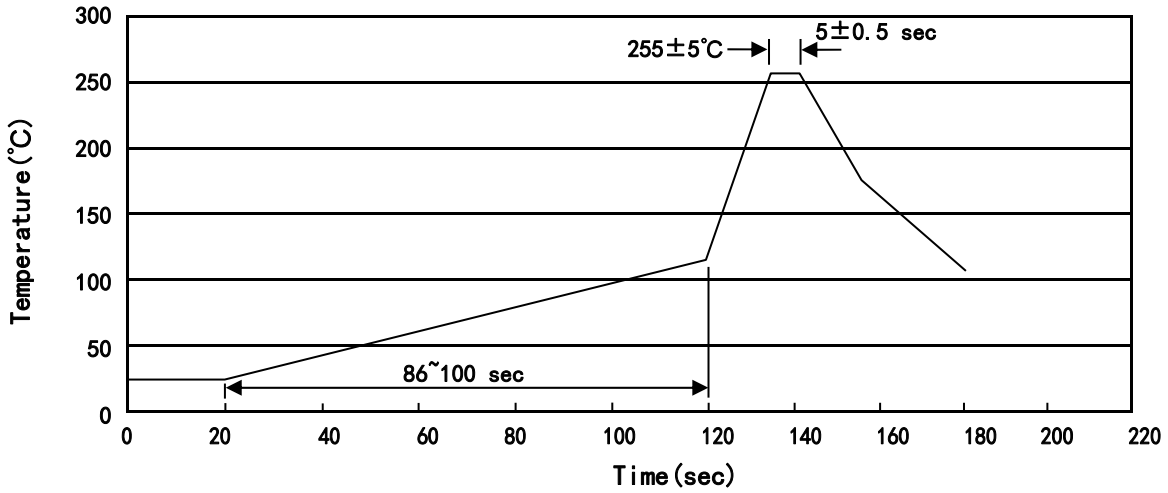

说明：

- 1、预热温度 25 ~ 150°C，时间 60 ~ 90sec;
- 2、峰值温度 255±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：270±5°C 时间：10±1 sec. Temp.:270±5°C Time:10±1 sec

包装规格 / Packaging SPEC.

散件包装 / BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

编带包装 / AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)	
	Units/tape 只/纸带	Tape/Inner Box 纸带/盒	Rows/Inner Box 纸带层/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Inner Box 盒	Outer Box 箱
TO-92	3,000	1	120	10	30,000	328×230×42	小箱 480×346×235, 大箱 547×407×268

使用说明 / Notices